




# Shenzhen Wirelope Metal Products Co.,Ltd.

info@wirelope.com cherry@wirelope.com




1 x 7

直径 Diameter (mm)	参考质量 Approx. Weight (kg/100m)	EN12385-4			DIN3052		GB/T9944-2002	GB/T8918-2006	
		最小破断拉力(KN) Min.Breaking Load			最小破断拉力(KN) Min.Breaking Load		最小破断拉力(KN) Min.Breaking Load	最小破断拉力(KN) Min.Breaking Load	
		1570/mm <sup>2</sup>	1770/mm <sup>2</sup>	1960/mm <sup>2</sup>	1570/mm <sup>2</sup>	1770/mm <sup>2</sup>		1570/mm <sup>2</sup>	1770/mm <sup>2</sup>
0.25	0.03	0.054	0.061	0.067	0.054	0.061	0.063	0.054	0.061
0.3	0.05	0.078	0.088	0.097	0.090	0.087	0.093	0.090	0.087
0.4	0.08	0.138	0.156	0.172	0.139	0.154	0.157	0.139	0.154
0.5	0.13	0.216	0.243	0.269	0.220	0.240	0.255	0.220	0.240
0.6	0.18	0.311	0.350	0.388	0.308	0.347	0.382	0.308	0.347
0.8	0.32	0.552	0.622	0.689	0.547	0.617	0.667	0.547	0.617
0.9	0.41	0.699	0.788	0.872	0.695	0.768	0.823	0.695	0.768
1.0	0.50	0.863	0.973	1.080	0.855	0.871	1.000	0.855	0.871
1.2	0.72	1.242	1.401	1.550	1.245	1.390	1.320	1.245	1.390
1.5	1.13	1.940	2.190	2.420	1.920	2.170	2.200	1.920	2.170
1.8	1.62	2.800	3.150	3.490	2.800	3.120	2.800	2.800	3.120
2.0	2.00	3.450	3.890	4.310	3.420	3.850	3.420	3.420	3.850
2.2	2.42	4.180	4.710	-	4.120	4.690	4.120	4.120	4.690
2.5	3.13	5.390	6.080	-	5.340	6.020	5.340	5.340	6.020
3.0	4.50	7.770	8.750	-	7.690	8.670	7.690	7.690	8.670
4.0	8.00	13.800	-	-	13.700	-	13.700	13.700	-
5.0	12.50	21.600	-	-	21.400	-	21.400	21.400	-
6.0	18.00	31.100	-	-	30.800	-	30.800	30.800	-




1 x 19

直径 Diameter (mm)	参考质量 Approx. Weight (kg/100m)	EN12385-4			DIN3053		GB/T9944-2002	GB/T8918-2006	
		最小破断拉力(KN) Min.Breaking Load			最小破断拉力(KN) Min.Breaking Load		最小破断拉力(KN) Min.Breaking Load	最小破断拉力(KN) Min.Breaking Load	
		1570/mm <sup>2</sup>	1770/mm <sup>2</sup>	1960/mm <sup>2</sup>	1570/mm <sup>2</sup>	1770/mm <sup>2</sup>		1570/mm <sup>2</sup>	1770/mm <sup>2</sup>
0.4	0.08	0.132	0.149	0.165	0.132	0.150	0.170	0.132	0.150
0.5	0.13	0.206	0.232	0.257	0.210	0.235	0.240	0.210	0.235
0.6	0.18	0.297	0.335	0.370	0.297	0.332	0.343	0.297	0.332
0.8	0.32	0.530	0.590	0.660	0.530	0.590	0.617	0.530	0.590
1.0	0.50	0.820	0.930	1.030	0.825	0.930	0.950	0.825	0.930
1.2	0.72	1.190	1.340	1.480	1.200	1.350	1.270	1.200	1.350
1.5	1.13	1.850	2.090	2.320	1.860	2.090	2.250	1.860	2.090
1.8	1.62	2.670	3.010	3.330	2.680	3.010	3.100	2.680	3.010
2.0	2.00	3.300	3.720	4.120	3.300	3.720	3.820	3.300	3.720
2.2	2.42	3.990	4.500	-	4.000	4.500	4.510	4.000	4.500
2.5	3.13	5.150	5.810	-	5.150	5.800	5.580	5.150	5.800
3.0	4.50	7.420	8.360	-	7.420	8.370	8.030	7.420	8.370
4.0	8.00	13.190	-	-	13.700	-	13.900	13.700	-
5.0	12.50	20.610	-	-	20.600	-	21.000	20.600	-
6.0	18.00	29.700	-	-	29.700	-	30.400	29.700	-
8.0	32.00	52.800	-	-	52.800	-	52.800	52.800	-
10.0	50.00	82.400	-	-	82.500	-	82.500	82.500	-
12.0	72.00	118.700	-	-	119.000	-	119.000	119.000	-
14.0	98.00	161.600	-	-	162.000	-	162.000	162.000	-
16.0	128.00	211.000	-	-	211.000	-	211.000	211.000	-
18.0	162.00	267.000	-	-	267.000	-	267.000	267.000	-
20.0	200.00	330.000	-	-	330.000	-	330.000	330.000	-




1 x 37

直径 Diameter (mm)	参考质量 Approx. Weight (kg/100m)	EN12385-4			DIN3054		GB/T9944-2002	GB/T8918-2006	
		最小破断拉力(KN) Min.Breaking Load			最小破断拉力(KN) Min.Breaking Load		最小破断拉力(KN) Min.Breaking Load	最小破断拉力(KN) Min.Breaking Load	
		1570/mm <sup>2</sup>	1770/mm <sup>2</sup>	1960/mm <sup>2</sup>	1570/mm <sup>2</sup>	1770/mm <sup>2</sup>		1570/mm <sup>2</sup>	1770/mm <sup>2</sup>
3.0	4.59	7.12	8.02	-	7.24	8.16	7.24	7.24	8.16
4.0	8.16	13.10	14.30	-	12.90	14.50	12.90	12.90	14.50
5.0	12.75	20.47	22.30	-	20.10	22.70	20.10	20.10	22.70
6.0	18.36	29.48	32.10	-	29.00	32.70	29.00	29.00	32.70
8.0	32.64	52.41	-	-	51.50	-	51.50	51.50	-
10.0	51.00	81.90	-	-	80.50	-	80.50	80.50	-
12.0	73.44	117.90	-	-	116.00	-	116.00	116.00	-
14.0	99.96	160.50	-	-	158.00	-	158.00	158.00	-
16.0	130.56	209.70	-	-	206.00	-	206.00	206.00	-
18.0	165.24	265.00	-	-	261.00	-	261.00	261.00	-
20.0	204.00	327.00	-	-	322.00	-	322.00	322.00	-

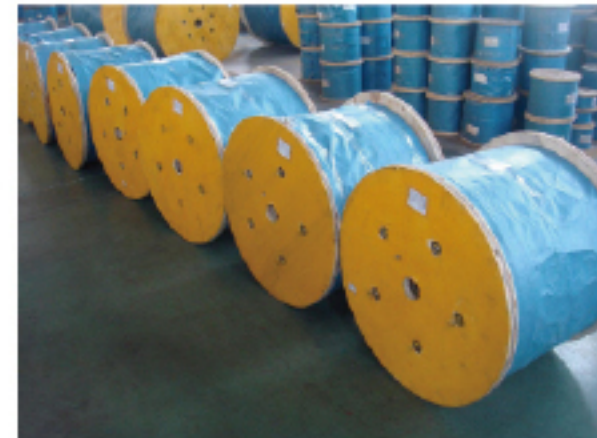






6x7+FC

直径	参考质量	EN12385-4			DIN3055		GB/T9944-2002	GB/T8918-2006	
		最小破断拉力(KN)			最小破断拉力(KN)		最小破断拉力(KN)	最小破断拉力(KN)	
Diameter	Approx. Weight	Min.Breaking Load			Min.Breaking Load		Min.Breaking Load	Min.Breaking Load	
(mm)	(kg/100m)	1570/mm <sup>2</sup>	1770/mm <sup>2</sup>	1960/mm <sup>2</sup>	1570/mm <sup>2</sup>	1770/mm <sup>2</sup>		1570/mm <sup>2</sup>	1770/mm <sup>2</sup>
1.0	0.36	0.520	0.590	0.650	0.520	0.590	0.660	0.520	0.590
1.2	0.52	0.750	0.850	0.940	0.750	0.850	0.950	0.750	0.850
1.5	0.81	1.170	1.330	1.460	1.170	1.330	1.500	1.170	1.330
1.8	1.17	1.700	1.910	2.120	1.700	1.910	2.200	1.700	1.910
2.0	1.44	2.080	2.350	2.600	2.080	2.350	2.600	2.080	2.350
2.2	1.74	2.550	2.850	3.170	2.550	2.850	3.200	2.550	2.850
2.5	2.25	3.260	3.670	4.070	3.260	3.670	4.100	3.260	3.670
3.0	3.24	4.690	5.290	5.860	4.690	5.290	5.300	4.690	5.280
4.0	5.76	8.340	9.400	10.400	8.340	9.410	9.500	8.330	9.400
5.0	9.00	13.030	14.700	16.300	13.030	14.700	13.100	13.000	14.600
6.0	12.96	18.800	21.200	-	18.800	21.100	19.000	18.700	21.100
8.0	23.04	33.400	37.600	-	33.400	37.600	33.500	33.300	37.600
10.0	36.00	52.100	58.800	-	52.200	58.800	52.200	52.100	58.700
12.0	51.84	75.100	84.600	-	75.100	84.700	75.100	75.000	84.600
14.0	70.56	102.200	-	-	102.000	-	102.000	102.000	-
16.0	92.16	133.400	-	-	134.000	-	134.000	133.000	-
18.0	116.64	170.000	-	-	169.000	-	169.000	168.000	-
20.0	144.00	210.000	-	-	209.000	-	209.000	208.000	-




6x19+FC

直径	参考质量	EN12385-4			DIN3060		GB/T9944-2002	GB/T8918-2006	
		最小破断拉力(KN)			最小破断拉力(KN)		最小破断拉力(KN)	最小破断拉力(KN)	
Diameter	Approx. Weight	Min.Breaking Load			Min.Breaking Load		Min.Breaking Load	Min.Breaking Load	
(mm)	(kg/100m)	1570/mm <sup>2</sup>	1770/mm <sup>2</sup>	1960/mm <sup>2</sup>	1570/mm <sup>2</sup>	1770/mm <sup>2</sup>		1570/mm <sup>2</sup>	1770/mm <sup>2</sup>
1.5	0.81	1.09	1.22	1.35	1.09	1.22	1.22	1.26	1.22
1.8	1.17	1.56	1.77	1.95	1.56	1.77	1.77	1.82	1.77
2.0	1.44	1.92	2.17	2.40	1.92	2.17	2.17	2.27	2.17
2.2	1.74	2.33	2.63	2.91	2.33	2.63	2.63	2.72	2.63
2.5	2.25	3.01	3.39	3.75	3.01	3.39	3.39	3.55	3.39
3.0	3.24	4.34	4.89	5.42	4.34	4.90	4.90	4.69	4.89
4.0	5.76	7.71	8.69	9.63	7.71	8.70	7.71	8.33	8.69
5.0	9.00	12.05	13.58	15.04	12.05	13.60	12.05	13.00	13.50
6.0	12.96	17.40	19.60	21.70	17.40	19.60	17.40	18.70	19.50
8.0	23.04	30.80	34.80	38.50	30.90	34.80	30.90	33.30	34.70
10.0	36.00	48.20	54.30	60.20	48.20	54.40	48.20	52.10	54.30
12.0	51.84	69.40	78.20	-	69.50	78.30	69.50	75.00	78.20
14.0	70.56	94.50	106.50	-	94.60	107.00	94.60	102.00	106.00
16.0	92.16	123.40	139.10	-	124.00	139.00	124.00	133.00	139.00
18.0	116.64	156.00	-	-	156.00	-	156.00	168.00	-
20.0	144.00	193.00	-	-	193.00	-	193.00	208.00	-
22.0	174.24	232.80	-	-	234.00	-	234.00	252.00	-
24.0	207.36	277.00	-	-	178.00	-	178.00	300.00	-
26.0	243.36	325.00	-	-	326.00	-	326.00	352.00	-
28.0	282.24	377.00	-	-	378.00	-	378.00	408.00	-



7x19  
(6x19+IWRC)


直径	参考质量	EN12385-4			DIN3060		GB/T9944-2002	GB/T8918-2006	
		最小破断拉力(KN)			最小破断拉力(KN)		最小破断拉力(KN)	最小破断拉力(KN)	
Diameter	Approx. Weight	Min.Breaking Load			Min.Breaking Load		Min.Breaking Load	Min.Breaking Load	
(mm)	(kg/100m)	1570/mm <sup>2</sup>	1770/mm <sup>2</sup>	1960/mm <sup>2</sup>	1570/mm <sup>2</sup>	1770/mm <sup>2</sup>		1570/mm <sup>2</sup>	1770/mm <sup>2</sup>
1.5	0.92	1.26	1.43	1.58	1.26	1.43	1.43	1.26	1.43
1.8	1.32	1.82	2.05	2.27	1.82	2.05	2.05	1.82	2.02
2.0	1.63	2.27	2.56	2.81	2.27	2.56	2.56	2.27	2.56
2.2	1.98	2.72	3.06	3.39	2.72	3.06	3.06	2.72	3.06
2.5	2.55	3.55	4.00	4.43	3.55	4.00	4.00	3.55	4.00
3.0	3.68	5.12	5.77	6.39	5.12	5.29	5.77	4.69	5.28
4.0	6.53	9.09	10.25	11.35	9.09	9.40	10.70	8.33	9.40
5.0	10.21	14.21	16.02	17.74	14.21	21.20	17.40	13.00	14.60
6.0	14.70	20.50	23.10	25.50	20.50	28.20	23.50	18.70	21.10
8.0	26.14	36.40	41.00	45.40	33.30	37.60	40.10	33.30	37.60
10.0	40.84	56.80	64.10	71.00	52.10	58.80	56.80	52.10	58.70
12.0	58.81	81.80	92.30	-	75.00	84.60	81.80	75.00	84.60
14.0	80.05	111.40	125.60	-	102.00	115.00	111.40	102.00	115.00
16.0	104.55	145.50	164.00	-	133.00	150.00	156.00	133.00	150.00
18.0	132.32	181.70	-	-	169.00	190.00	181.70	168.00	-
20.0	163.36	224.40	-	-	208.00	235.00	224.40	208.00	-
22.0	197.67	271.50	-	-	252.00	284.00	271.50	252.00	-
24.0	235.24	323.00	-	-	300.00	338.00	323.00	300.00	-
26.0	276.08	378.00	-	-	352.00	397.00	378.00	352.00	-
28.0	320.19	439.80	-	-	409.00	461.00	439.80	408.00	-



7x7(6x7+IWS)

直径	参考质量	EN12385-4			DIN3055		GB/T9944-2002	GB/T8918-2006	
		最小破断拉力(KN)			最小破断拉力(KN)		最小破断拉力(KN)	最小破断拉力(KN)	
Diameter	Approx. Weight	Min.Breaking Load			Min.Breaking Load		Min.Breaking Load	Min.Breaking Load	
(mm)	(kg/100m)	1570/mm <sup>2</sup>	1770/mm <sup>2</sup>	1960/mm <sup>2</sup>	1570/mm <sup>2</sup>	1770/mm <sup>2</sup>		1570/mm <sup>2</sup>	1770/mm <sup>2</sup>
0.36	0.05	0.079	0.089	0.097	0.079	0.089	0.090	0.074	0.083
0.45	0.08	0.124	0.140	0.151	0.124	0.140	0.142	0.115	0.130
0.5	0.10	0.153	0.172	0.186	0.153	0.172	0.176	0.145	0.160
0.6	0.15	0.220	0.248	0.268	0.220	0.248	0.253	0.204	0.230
0.8	0.26	0.390	0.440	0.477	0.390	0.440	0.461	0.360	0.410
0.9	0.33	0.495	0.560	0.600	0.495	0.560	0.539	0.460	0.520
1.0	0.41	0.610	0.690	0.760	0.610	0.690	0.637	0.570	0.640
1.2	0.58	0.880	0.990	1.100	0.880	0.990	1.200	0.820	0.920
1.5	0.91	1.370	1.550	1.710	1.370	1.550	1.670	1.280	1.440
1.8	1.32	1.970	2.230	2.460	1.970	2.230	2.250	1.840	2.070
2.0	1.62	2.440	2.540	2.810	2.440	2.540	2.940	2.080	2.350
2.2	1.97	2.960	3.300	3.510	2.960	3.300	3.400	2.800	3.120
2.5	2.54	3.810	4.290	4.750	3.810	4.290	4.350	3.540	4.000
3.0	3.65	5.480	5.720	6.330	5.480	5.710	6.370	4.690	5.280
4.0	6.50	9.750	10.200	11.300	9.750	10.200	9.510	8.330	9.400
5.0	10.15	15.230	15.900	17.600	15.230	22.900	14.700	13.000	14.600
6.0	14.62	21.900	22.900	-	21.900	40.600	18.600	18.700	21.100
8.0	25.98	39.000	40.700	-	36.100	63.500	40.600	33.300	37.600
10.0	40.60	60.900	63.500	-	56.300	91.500	57.100	52.100	58.700
12.0	58.46	97.700	91.500	-	81.100	-	82.100	75.000	84.600
14.0	79.58	119.800	-	-	110.000	-	110.000	102.000	-
16.0	103.94	156.500	-	-	144.000	-	144.000	133.000	-
18.0	131.54	198.000	-	-	183.000	-	183.000	168.000	-
20.0	162.40	244.500	-	-	225.000	-	225.000	208.000	-






18 × 7+FC

直径 Diameter (mm)	参考质量 Approx. Weight (kg/100m)	EN12385-4			DIN3069		GB/T9944-2002	GB/T8918-2006	
		最小破断拉力(KN)			最小破断拉力(KN)		最小破断拉力(KN)	最小破断拉力(KN)	
		Min.Breaking Load			Min.Breaking Load		Min.Breaking Load	Min.Breaking Load	
		1570/mm <sup>2</sup>	1770/mm <sup>2</sup>	1960/mm <sup>2</sup>	1570/mm <sup>2</sup>	1770/mm <sup>2</sup>		1570/mm <sup>2</sup>	1770/mm <sup>2</sup>
3.0	3.47	4.66	5.25	5.82	4.66	5.25	4.66	4.66	5.25
4.0	6.16	8.28	9.33	10.40	8.28	9.02	8.28	8.28	9.02
5.0	9.63	12.90	14.60	16.20	12.90	14.10	12.90	12.90	14.10
6.0	13.86	18.50	20.90	23.10	18.50	20.30	18.50	18.50	20.30
8.0	24.64	33.00	37.20	41.10	32.00	36.10	32.00	32.00	36.10
10.0	38.50	51.50	58.10	64.30	50.00	56.40	50.00	50.00	56.40
12.0	55.44	74.20	83.60	-	72.00	81.20	72.00	72.00	81.20
14.0	75.46	100.90	114.00	-	98.00	111.00	98.00	98.00	111.00
16.0	98.56	131.80	149.00	-	128.00	144.00	128.00	128.00	144.00
18.0	124.74	167.00	-	-	162.00	-	162.00	162.00	-
20.0	154.00	206.00	-	-	200.00	-	200.00	200.00	-
22.0	186.34	249.00	-	-	242.00	-	242.00	242.00	-
24.0	221.76	297.00	-	-	288.00	-	288.00	288.00	-
26.0	260.26	350.00	-	-	338.00	-	338.00	338.00	-
28.0	301.84	406.00	-	-	392.00	-	392.00	392.00	-



6 × 37+FC

直径 Diameter (mm)	参考质量 Approx. Weight (kg/100m)	EN12385-4			DIN3066		GB/T9944-2002	GB/T8918-2006	
		最小破断拉力(KN)			最小破断拉力(KN)		最小破断拉力(KN)	最小破断拉力(KN)	
		Min.Breaking Load			Min.Breaking Load		Min.Breaking Load	Min.Breaking Load	
		1570/mm <sup>2</sup>	1770/mm <sup>2</sup>	1960/mm <sup>2</sup>	1570/mm <sup>2</sup>	1770/mm <sup>2</sup>		1570/mm <sup>2</sup>	1770/mm <sup>2</sup>
4.0	6.08	7.99	9.00	9.98	7.99	9.00	9.00	7.99	9.00
5.0	9.50	12.50	14.10	15.60	12.50	14.10	14.10	12.50	14.10
6.0	13.68	18.00	20.30	22.50	18.00	20.30	20.30	18.00	20.30
8.0	24.32	32.00	36.00	39.90	32.00	36.10	36.10	32.00	36.10
10.0	38.00	50.00	56.30	62.40	50.00	56.40	56.40	50.00	56.40
12.0	54.72	72.00	81.10	89.80	72.00	81.20	72.00	72.10	81.30
14.0	74.48	97.80	110.40	122.20	98.00	110.00	98.00	98.10	110.00
16.0	97.28	127.90	144.10	159.60	128.00	144.00	128.00	128.00	144.00
18.0	123.12	161.80	182.40	-	162.00	183.00	162.00	162.00	-
20.0	152.00	200.00	225.20	-	200.00	225.00	200.00	200.00	-
22.0	183.92	241.70	-	-	242.00	273.00	242.00	242.00	-
24.0	218.88	287.70	-	-	288.00	325.00	288.00	288.00	-
26.0	256.88	337.60	-	-	338.00	381.00	338.00	338.00	-
28.0	297.92	392.00	-	-	394.00	442.00	394.00	394.00	-



19 × 7


直径 Diameter (mm)	参考质量 Approx. Weight (kg/100m)	EN12385-4			DIN3069		GB/T9944-2002	GB/T8918-2006	
		最小破断拉力(KN)			最小破断拉力(KN)		最小破断拉力(KN)	最小破断拉力(KN)	
		Min.Breaking Load			Min.Breaking Load		Min.Breaking Load	Min.Breaking Load	
		1570/mm <sup>2</sup>	1770/mm <sup>2</sup>	1960/mm <sup>2</sup>	1570/mm <sup>2</sup>	1770/mm <sup>2</sup>		1570/mm <sup>2</sup>	1770/mm <sup>2</sup>
3.0	3.68	4.63	5.23	5.79	4.63	5.23	4.63	4.63	5.23
4.0	6.53	8.24	9.29	10.29	8.24	9.29	8.24	8.24	9.29
5.0	10.21	12.87	14.51	16.07	12.87	14.50	12.87	12.87	14.50
6.0	14.70	18.50	20.90	23.10	18.50	20.90	18.50	18.50	20.90
8.0	26.14	33.00	37.20	41.10	33.00	37.20	33.00	32.90	37.10
10.0	40.84	51.50	58.10	64.30	51.50	58.10	51.50	51.40	58.00
12.0	58.81	74.20	83.60	-	74.20	83.60	74.20	74.10	83.60
14.0	80.05	100.90	113.80	-	101.00	114.00	101.00	100.00	113.00
16.0	104.55	131.80	148.60	-	132.00	149.00	132.00	131.00	148.00
18.0	132.32	164.80	-	-	167.00	-	167.00	166.00	-
20.0	163.36	203.60	-	-	206.00	-	206.00	205.00	-
22.0	197.67	246.30	-	-	249.00	-	249.00	249.00	-
24.0	235.24	293.00	-	-	297.00	-	297.00	296.00	-
26.0	276.08	344.00	-	-	348.00	-	348.00	348.00	-
28.0	320.19	398.00	-	-	404.00	-	404.00	403.00	-



7 × 37


直径 Diameter (mm)	参考质量 Approx. Weight (kg/100m)	EN12385-4			DIN3066		GB/T9944-2002	GB/T8918-2006	
		最小破断拉力(KN)			最小破断拉力(KN)		最小破断拉力(KN)	最小破断拉力(KN)	
		Min.Breaking Load			Min.Breaking Load		Min.Breaking Load	Min.Breaking Load	
		1570/mm <sup>2</sup>	1770/mm <sup>2</sup>	1960/mm <sup>2</sup>	1570/mm <sup>2</sup>	1770/mm <sup>2</sup>		1570/mm <sup>2</sup>	1770/mm <sup>2</sup>
4.0	6.56	7.99	9.00	9.98	7.99	9.00	9.00	7.99	9.00
5.0	10.25	12.50	14.10	15.60	12.50	14.10	14.10	12.50	14.10
6.0	14.76	18.00	20.30	22.50	18.00	20.30	20.30	18.00	20.30
8.0	26.24	32.00	36.00	39.90	32.00	36.10	36.10	32.00	36.10
10.0	41.00	50.00	56.30	62.40	50.00	56.40	56.40	50.00	56.40
12.0	59.04	72.00	81.10	89.80	72.00	81.20	72.00	72.10	81.30
14.0	80.36	97.80	110.40	122.20	98.00	110.00	98.00	98.10	110.00
16.0	104.96	127.90	144.10	159.60	128.00	144.00	128.00	128.00	144.00
18.0	132.84	161.80	182.40	-	162.00	183.00	162.00	162.00	-
20.0	164.00	200.00	225.20	-	200.00	225.00	200.00	200.00	-
22.0	198.44	241.70	-	-	242.00	273.00	242.00	242.00	-
24.0	236.16	287.70	-	-	288.00	325.00	288.00	288.00	-
26.0	277.16	337.60	-	-	338.00	381.00	338.00	338.00	-
28.0	321.44	392.00	-	-	394.00	442.00	394.00	394.00	-





6 × 36WS+FC

直径 Diameter (mm)	参考质量 Approx. Weight (kg/100m)	EN12385-4			DIN3064		GB/T9944-2002	GB/T8918-2006	
		最小破断拉力(KN) Min.Breaking Load			最小破断拉力(KN) Min.Breaking Load		最小破断拉力(KN) Min.Breaking Load	最小破断拉力(KN) Min.Breaking Load	
		1570/mm <sup>2</sup>	1770/mm <sup>2</sup>	1960/mm <sup>2</sup>	1570/mm <sup>2</sup>	1770/mm <sup>2</sup>		1570/mm <sup>2</sup>	
6.0	13.86	18.70	21.00	23.30	18.70	21.00	21.00	18.70	21.00
8.0	24.64	33.20	37.40	41.10	33.20	37.40	37.40	33.20	37.40
10.0	38.50	51.80	58.40	64.70	51.80	58.40	58.40	51.80	58.40
12.0	55.44	74.60	84.10	-	74.40	84.00	84.00	74.60	84.10
14.0	75.46	101.50	114.00	-	101.00	114.00	101.00	101.00	114.00
16.0	98.56	132.60	150.00	-	133.00	149.00	133.00	132.00	149.00
18.0	124.74	168.00	-	-	168.00	-	168.00	167.00	-
20.0	154.00	207.00	-	-	203.00	-	203.00	207.00	-
22.0	186.34	251.00	-	-	250.00	-	250.00	250.00	-
24.0	221.76	298.00	-	-	298.00	-	298.00	298.00	-
26.0	260.26	350.00	-	-	340.00	-	340.00	350.00	-
28.0	301.84	406.00	-	-	405.00	-	405.00	406.00	-



6 × 36WS+IWRC

直径 Diameter (mm)	参考质量 Approx. Weight (kg/100m)	EN12385-4			DIN3064		GB/T9944-2002	GB/T8918-2006	
		最小破断拉力(KN) Min.Breaking Load			最小破断拉力(KN) Min.Breaking Load		最小破断拉力(KN) Min.Breaking Load	最小破断拉力(KN) Min.Breaking Load	
		1570/mm <sup>2</sup>	1770/mm <sup>2</sup>	1960/mm <sup>2</sup>	1570/mm <sup>2</sup>	1770/mm <sup>2</sup>		1570/mm <sup>2</sup>	1770/mm <sup>2</sup>
6.0	15.30	20.10	22.70	25.10	20.10	22.70	22.70	20.10	22.70
8.0	27.20	35.80	40.30	44.70	35.80	40.30	40.30	35.80	40.30
10.0	42.50	55.90	63.00	69.80	55.90	63.00	55.90	55.90	63.00
12.0	61.20	80.50	90.70	-	80.60	89.90	80.60	80.40	90.70
14.0	83.30	109.50	124.00	-	109.00	124.00	109.00	109.00	123.00
16.0	108.80	143.10	161.00	-	143.00	161.00	143.00	143.00	161.00
18.0	137.70	181.00	-	-	181.00	204.00	181.00	181.00	-
20.0	170.00	224.00	-	-	221.00	252.00	221.00	223.00	-
22.0	205.70	271.00	-	-	271.00	304.00	271.00	270.00	-
24.0	244.80	322.00	-	-	322.00	363.00	322.00	321.00	-
26.0	287.30	378.00	-	-	378.00	425.00	378.00	377.00	-
28.0	333.20	438.00	-	-	438.00	493.00	438.00	438.00	-

规格		7 × 7			7 × 19			1 × 19		
		1.5	2.0	3.0	2.0	3.0	4.0	1.5	2.0	3.0
		W=30	H	52.0	-	-	-	-	-	-
	X	30.0	-	-	-	-	-	-	-	-
	kg/m <sup>2</sup>	1.20	-	-	-	-	-	-	-	-
W=40	H	69.2	-	-	-	-	-	-	-	-
	X	40.0	-	-	-	-	-	-	-	-
	kg/m <sup>2</sup>	0.81	-	-	-	-	-	-	-	-
W=50	H	86.6	86.6	86.6	86.6	86.6	86.6	86.6	86.6	86.6
	X	50.0	50.0	50.0	50.0	50.0	50.0	50.0	50.0	50.0
	kg/m <sup>2</sup>	0.60	0.97	2.34	0.97	2.34	5.29	0.70	1.14	2.73
W=60	H	104.0	104.0	104.0	104.0	104.0	104.0	104.0	104.0	104.0
	X	60.0	60.0	60.0	60.0	60.0	60.0	60.0	60.0	60.0
	kg/m <sup>2</sup>	0.48	0.78	1.86	0.78	1.86	4.07	0.56	0.92	2.19
W=70	H	121.2	121.2	121.2	121.2	121.2	121.2	121.2	121.2	121.2
	X	70.0	70.0	70.0	70.0	70.0	70.0	70.0	70.0	70.0
	kg/m <sup>2</sup>	0.36	0.59	1.40	0.59	1.40	3.29	0.45	0.71	1.66
W=80	H	138.6	138.6	138.6	138.6	138.6	138.6	138.6	138.6	138.6
	X	80.0	80.0	80.0	80.0	80.0	80.0	80.0	80.0	80.0
	kg/m <sup>2</sup>	0.07	0.09	0.26	0.09	0.26	2.74	0.34	0.56	1.32
W=100	H	173.2	173.2	173.2	173.2	173.2	173.2	173.2	173.2	173.2
	X	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
	kg/m <sup>2</sup>	0.26	0.43	1.02	0.43	1.02	2.05	0.31	0.52	1.21
W=120	H	268.0	268.0	268.0	268.0	268.0	268.0	268.0	268.0	268.0
	X	120.0	120.0	120.0	120.0	120.0	120.0	120.0	120.0	120.0
	kg/m <sup>2</sup>	0.20	0.35	0.80	0.35	0.80	1.54	0.24	0.42	0.97
W=140	H	242.4	242.4	242.4	242.4	242.4	242.4	242.4	242.4	242.4
	X	140.0	140.0	140.0	140.0	140.0	140.0	140.0	140.0	140.0
	kg/m <sup>2</sup>	0.18	0.30	0.70	0.30	0.70	1.35	0.21	0.36	0.84
W=160	H	277.2	277.2	277.2	277.2	277.2	277.2	277.2	277.2	277.2
	X	160.0	160.0	160.0	160.0	160.0	160.0	160.0	160.0	160.0
	kg/m <sup>2</sup>	0.15	0.26	0.60	0.26	0.60	1.16	0.18	0.31	0.73
W=180	H	312.0	312.0	312.0	312.0	312.0	312.0	312.0	312.0	312.0
	X	180.0	180.0	180.0	180.0	180.0	180.0	180.0	180.0	180.0
	kg/m <sup>2</sup>	0.23	0.23	0.53	0.23	0.53	1.01	0.16	0.28	0.64

常用的不锈钢成分应用一览表

Commonly used in Stainless Steel Composition in Applications as List

牌号 Type	化学成分 Chemical composition%									
	C	Si	Mn	P	S	Ni	Cr	Mo	Cu	Others
201F	0.15	1.00	5.5-7.5	0.06	0.030	0.1-0.5	10.0-14.0			N≤0.25
201	0.15	1.00	5.5-7.5	0.06	0.030	3.50-5.50	16.0-18.0			
202	0.15	1.00	7.5-10	0.06	0.030	4.0-6.00	17.0-19.0			
301	0.15	1.00	2.00	0.045	0.030	6.0-8.00	16.0-18.0			
302	0.15	1.00	2.00	0.045	0.030	8.0-10.0	17.0-19.0			N≤0.15
AISI304	0.08	1.00	2.00	0.045	0.030	8.0-10.50	18.0-20.0			
GB304	0.08	1.00	2.00	0.035	0.030	8.0-11.00	17.0-19.0			
304L	0.03	1.00	2.00	0.045	0.030	9.0-13.00	18.0-20.0	2-3		
AISI316	0.08	1.00	2.00	0.045	0.030	10.0-14.0	16.0-18.0	2-3		
GB316	0.08	1.00	2.00	0.035	0.030	10.0-14.0	16.0-18.5	2-3		N≤0.1
316L	0.03	1.00	2.00	0.035	0.030	10.0-14.0	16.0-18.0			Ti:5(C+N)
321	0.08	1.00	2.00	0.045	0.030	9.0-13.0	17.0-19.0			min0.7max
309	0.08	1.00	1.00	0.045	0.030	12.0-15.0	22.0-24.0			
310	0.08	1.50	2.00	0.045	0.030	19.0-22.0	24.0-26.0			
410	0.015	1.00	1.00	0.040	0.030	---	11.5-13.5			
420	0.26-0.4	1.00	1.00	0.040	0.030	---	12.0-14.0			
430	0.12	0.75	1.00	0.040	0.030	---	16.0-18.0			